

## Type V050 Two Slope units

### Dimensions:

- Track length: max. 7m (each individual unit)
- Unit height: max. 5m
- Angle: max. 55° (each individual unit)

**Operating height:** Standard dimension 1.55 m measured from the topmost point of the end cap for chain/cord.

**Louvre widths** in mm: 127 (standard)

89  
63.5

Other louvre widths on inquiry.

### Louvre stacking:

Always on the high side of the unit.


### Louvre stack width:

Depends on the number and width of the louvres (for table of louvre stack widths, see the price list).

(each individual unit)

### Mounting variants

- Top fix brackets
- Face fix brackets with adjustable distances from the wall: 60-108 mm, 108-156 mm, 156-204 mm



Two slope units with louvre overlap. Operation elements are fitted at the outer ends.

TYPE V050

## Measuring and Pricing

[www.rolety.czest.pl](http://www.rolety.czest.pl)


The unit dimensions are worked out at the factory. It is necessary to state the dimensions of the surface to be covered (e.g. of the window opening).

**Order widths = Base widths**

**Order heights = From the top corner point of the surface to be covered to the bottommost edge of the louvre.**

### Example for determining the dimensions

1. Determine what total area is to be covered by the unit.
2. Mark the top corner points on the building.
3. Drop a plumb line from the top corner points to the base and mark there (e.g. window sill or floor).
4. Measure the base width between the marked points = order width (do not deduct any take-off dimensions).
5. Measure the heights. Allow for the necessary take-off dimensions (approx. 1-3 cm).

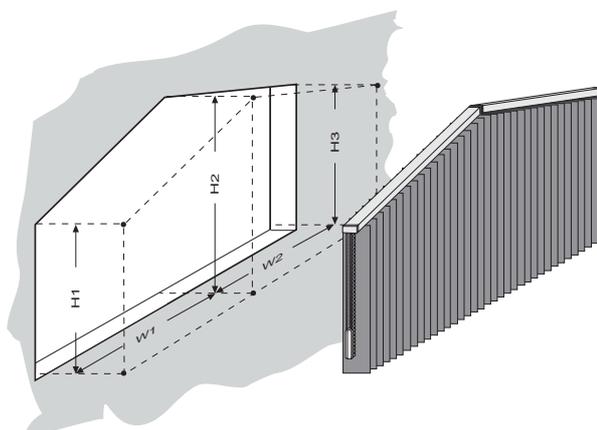

**Price widths = Base widths**


**Price height = Greatest height (H2)**

Pricing for Type V050 is the same as for two Types V040/V041 units.

The basic price is determined on the basis of price widths, price height and louvre quality (note the price group).

Additional charge for the slope units are added to the basic price.

Additional charges for track colour, louvre widths, operation and mounting variants as well as the additional charges for slope units are added to the basic price.

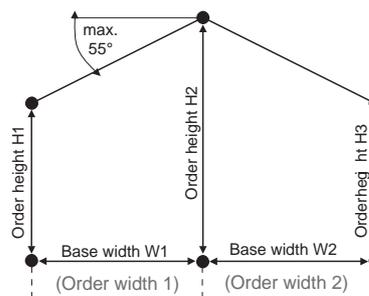


## Operation variants

The Type V050 units are fitted with a chain/cord with the integrated lock as a standard feature; this prevents the hanging from being drawn back. The planetary gear is used for heavy hangings. The operation elements can be fitted right or left, but should be fitted at a free end (min. height 50 cm; if planetary gear is fitted min. height 65 cm). The IQ-Motor is always positioned on the high side of the unit (above or beside the track).

Chain/cord with cord lock



Chain/cord 4:1 with cord lock



IQ-Motor system

