

Type R011 / R061

Roller blind width: max.2.40 m (depending on the fabric)

Roller blind height: max.3.00 m (depending on the fabric)


Operation: Type R011: chain
Type R061: motor

Operation side: Optional left or right

Operation height: Standard dimension = Roller blind height x 0.75

Patter of the hanging: Optional facing inwards or outwards (standard: facing inwards)

Profile colour: Standard white RAL 9016 or grey RAL 9006
Optional black RAL 9005 or brown RAL 8077

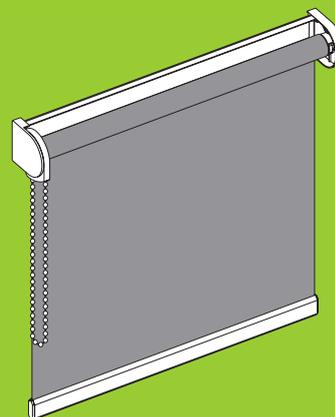


Type R011 Side control roller blind with mounting plate.
Type R061 Motor roller blind with mounting plate.

TYPER011 / R061

Measuring and ordering


www.rolety.czyst.pl

Dimensions in the reveal

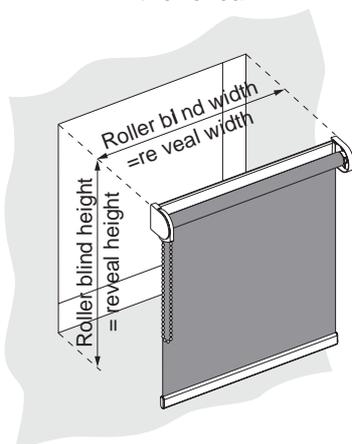


Dimensions in the reveal
Measure the reveal exactly at the necessary mounting height.

Dimensions for face fixing

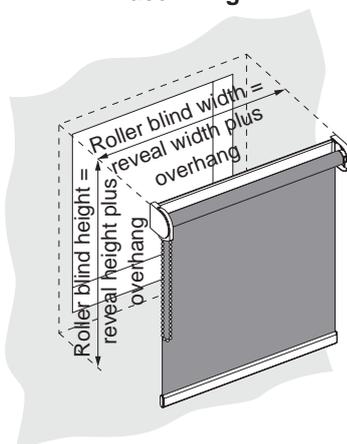

Dimensions for face fixing
When mounting in the front of the window, allow for the necessary overhang.

Dimensions on the wing of the window

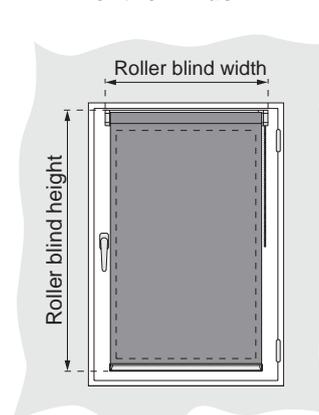

Mounting on the wing of the window
Make allowance for the side distance of the fabric from the window fittings.

Roller blind width

From the outermost point of the left cover cap to the outermost point of the right cover cap. The fabric is 30 mm or in the case of cord guiding 42 mm narrower than the roller blind width.


Roller blind height

From the topmost pint of the cover cap of the bracket to the bottommost point of the cosing profile of the hanging.

Roller blind width(W) = Order width
Roller blind height (H) = Order height

The basic price is determined on the basis of the width (W), the height (H) and the fabric quality (note the price group).

Additional charges for cord guiding, valance, motor operation (Type R061), mounting variants or special accessories are added to the basic price.

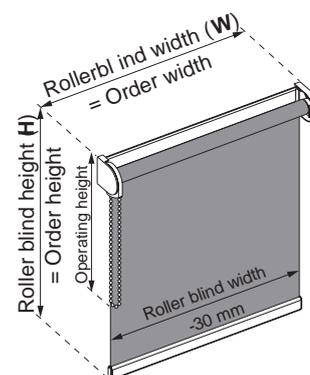

Mounting

Various fix brackets and block holders are available for simple mounting of the pre-assembled roller blind on the wall, on the ceiling, in the window jamb or on the wing of a window.

Standard: Wall or ceiling mounting with clip.

Fastening clip



Distances from other objects

Minimum distance between the hanging and protruding parts (e. g. window handles, etc.): 10-15 mm.


Special variants

Available as special accessoires are adjustable face fix brackets (60-108 mm, 108-156 mm and 156-204 mm) that can be used in place of the face fix bracket 33 mm.


Holder, long

The holder, long (length: 44 mm) is the standard element used for thick fabrics and large heights of the hanging to ensure a sufficient distance from the wall or from the mounting plate.


Wall mounting (with clip)



Ceiling mounting (with clip)




Ceiling- / wall mounting (with holder, long)



Is used in the case of roller blinds with large heights of the hanging or for fabrics of greater thickness.


Wall mounting

(with face fix bracket, variable)

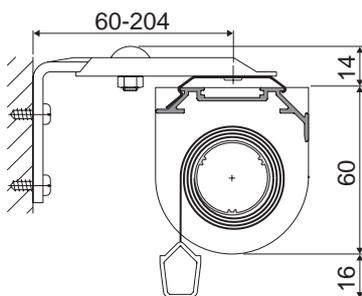


Mounting on the wing of a window

(with block holder)

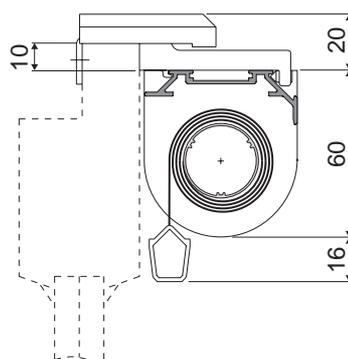

Mounting in the window jamb

(with face fix bracket 33 mm)

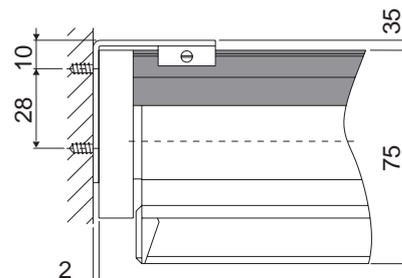


The **cord guiding** is available as an equipment option for Type R011 and Type R061.


The hanging of the roller blind is guided between two cords running parallel to the wing of the window also when the window is in the inclined position (max. angle of inclination 15°). The cord is invisibly mounted in the cord guiding groove of the mounting plate. The cord runs through endpieces on the closing profile of the hanging which guarantee reliable guiding.

Material (cord): Standard = steel, plastic-coated, transparent or white (1.4 mm) or nylon, transparent (2 mm).

Accessories: Angle bracket for cord fixing (galvanised), block holder for cord fixing.

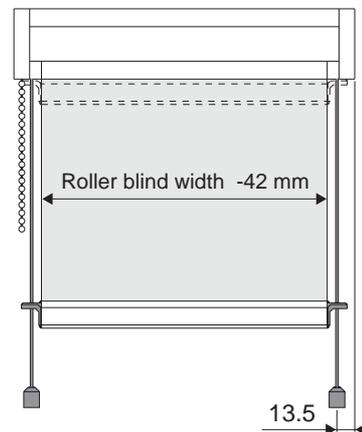


Cord fixing

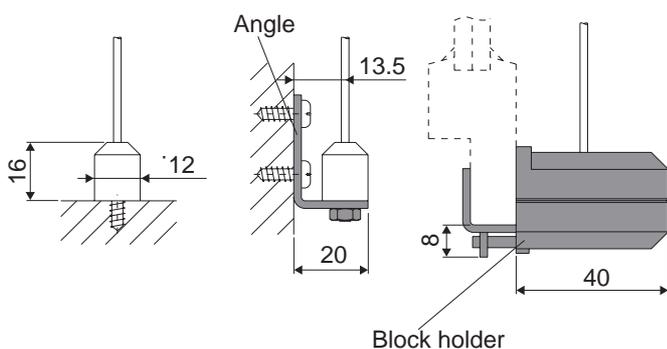

Cord path

Ceiling mounting

Wall mounting

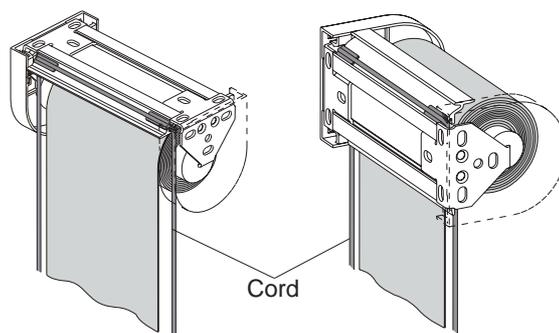

Valance

The **valance** is available as an option for Type R011 and Type R061 (without the side guiding system option).

The roller blind hanging and the valance can be combined from all textile or non-coated fabrics of the roller blind collection. The valance shape can be freely selected.

The roller blind with valance is fitted with the closing profile for hangings with a valance, into which the upper part of the valance is inserted. The valance is bordered and the colour of the border matches the colour of the profile.

Valance shapes

Straight

Triangle

Notch

Wave

