

Type R031


Roller blind width: max.2.00 m (depending on the fabric)

Roller blind height: max.2.00 m (depending on the fabric)

Pattern of the hanging: Optional facing inwards or outwards (standard: facing inwards)

Profile colour: Standard white RAL 9016 or grey RAL 9006
Optional black RAL 9005 or brown RAL 8077

Operation: The hanging rolls after unlocking up controlled and soft independent.

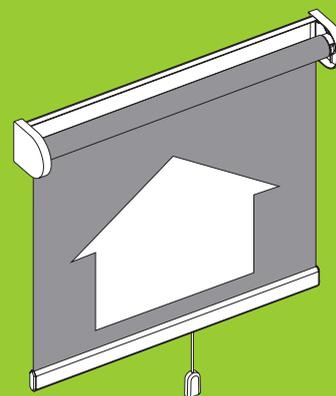


TYPE R031

Type R031 Soft roller blind- Mid control roller blind with mounting plate.

Measuring and ordering

www.rolety.czest.pl


Dimensions in the reveal

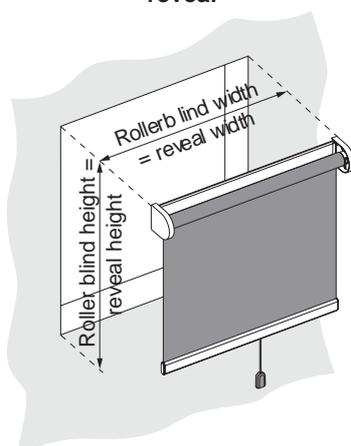

Mounting in the reveal

Measure the reveal exactly at the necessary mounting height.


Dimensions for face fixing

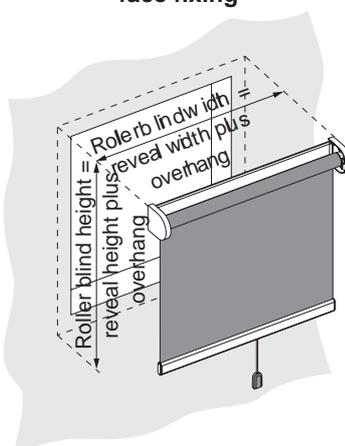

Mounting for face fixing

When mounting in front of the window, allow for the necessary overhang.

Dimensions on the wing of the window

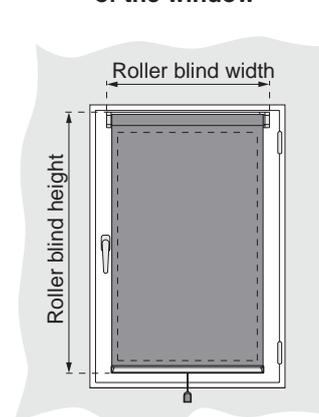

Mounting on the wing of the window

Make allowance for the side distance of the fabric from window fittings.

Note: Please declare the way of mounting (wall mounting, ceiling mounting) on your order.

Roller blind width

From the outermost point of the left cover cap to the outermost point of the right cover cap. The fabric is 30 mm narrower than the roller blind width.

Roller blind height


From the topmost point of the cover cap of the bracket to the bottommost point of the closing profile of the hanging.

Roller blind width (W) = Order width
Roller blind height (H) = Order height

The basic price is determined on the basis of the width (W), the height (H) and the fabric quality (note the price group).

Additional charge for the type is added to the basic price.

Additional charges for valance, mounting variants or special accessories are added to the basic price.

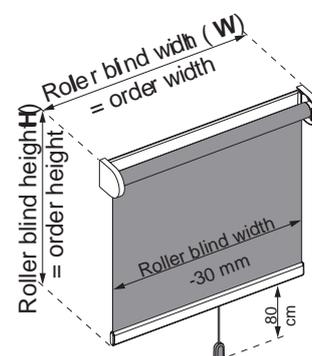

Mounting

Various fix brackets and block holders are available for simple mounting of the pre-assembled roller blind on the wall, on the ceiling, in the window jamb or on the wing of a window.

Standard: Wall or ceiling mounting with clip.

Fastening clip



Distances from other objects

Minimum distance between the hanging and protruding parts (e. g. window handles, etc.): 10-15 mm.


Special variants

Available as special accessoires are adjustable face fix brackets (60-108 mm, 108-156 mm and 156-204 mm) that can be used in place of the face fix bracket 33 mm.


Holder, long

The holder, long (length: 44 mm) is the standard element used for thick fabrics and large heights of the hanging to ensure a sufficient distance from the wall or from the mounting plate.


Wall mounting (with clip)



Ceiling mounting (with clip)

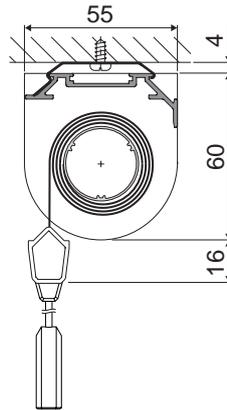


Ceiling / wall mounting (with holder, long)

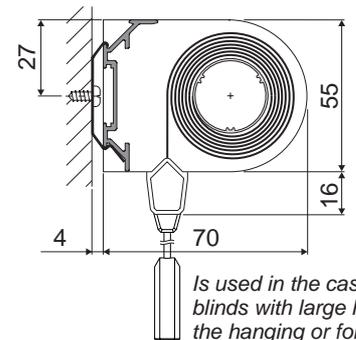


Is used in the case of roller blinds with large heights of the hanging or for fabrics of greater thickness.


Wall mounting (with face fix bracket, variable)

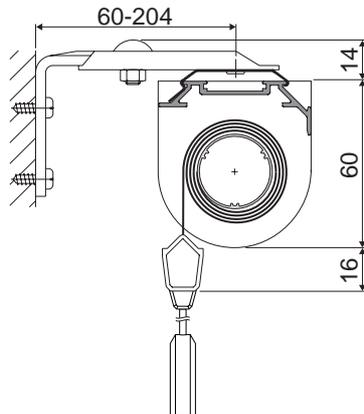

Mounting on the wing of a window (with block holder)

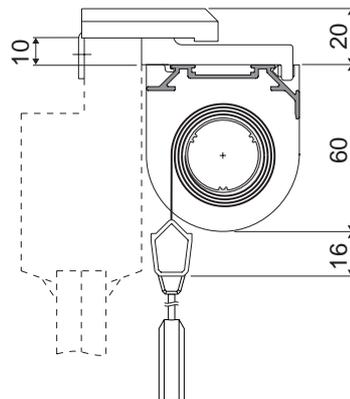

Mounting in the window jamb (with face fix bracket 33 mm)

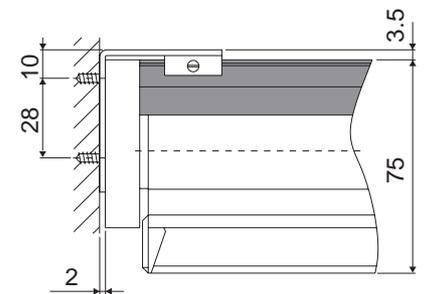

Valance


The **valance** is available as an option for Type R021.

The roller blind hanging and the valance can be combined from all textile or non-coated fabrics of the roller blind collection. The valance shape can be freely selected.


The roller blind with valance is fitted with the closing profile for hangings with a valance, into which the upper part of the valance is inserted. The valance is bordered and the colour of the border matches the colour of the profile. To operate the blind, a pull ribbon with a handle is fitted that matches the valance shape and the border.

Valance shapes


Straight



Triangle



Notch



Wave

