

## Type V083 Spirale unit

### Dimensions:

- Straightened track length: max.5.6m
- Unit height: max.5 m

**Operating height:** Standard dimension 1.55 m measured from the topmost point of the end cap for chain/cord.

**Louvre widths** in mm:127 (standard)  
89  
63.5

Other louvre widths on inquiry.

### Minimum radius:

900 mm (127 mm louvre),  
650 mm ( 89 mm louvre),  
550 mm ( 63.5 mm louvre).

### Louvre stacking:

Always at the highest point.

### Louvre stack width:


Depends on the number and width of the louvres (for table of louvre stack widths, see the price list).

### Mounting variants

- Top fix brackets
- Face fix brackets with adjustable distances from the wall: 60-108 mm, 108-156 mm, 156-204 mm

### Take-off dimensions

Recommended floor clearance:  
In the case of flat, even floors approx. 1 cm, in the case of high-pile carpeting or out-of-horizontalf floors approx. 3 cm.

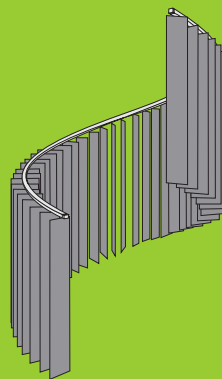

TYPE V083

Spiral unit.

Hanging can be fitted on one side only.  
Operation element always on left.

## Measuring and Pricing

[www.rolety.czest.pl](http://www.rolety.czest.pl)

The curved unit Type V083 is defined via the angle, the radius, the gradient and the unit height.

Note: Please attach sketch or template

### Gradient:



The difference between the topmost edge of the track at the bottom end and the topmost edge of the track at the top end of the unit.

### Order height = Unit height

(From topmost edge of the track to bottommost of the louvres.)

### Radius when measuring for the track:

State the radius to the centre line of the track.

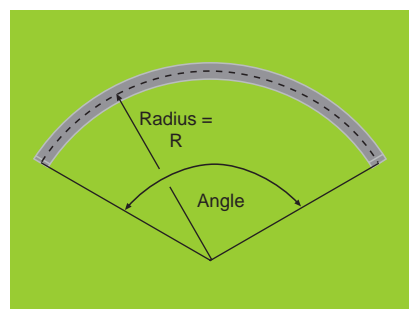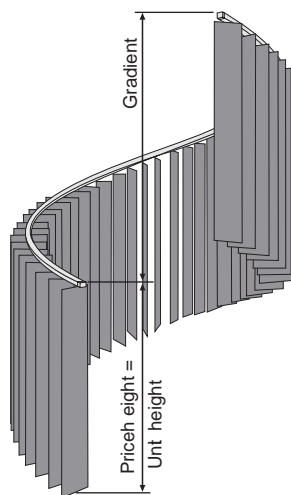

**Price width = Straightened track length**  
**Price height = Unit height**


The straightened track length of the arc (in cm) is calculated by applying the following formula:

Radius (in cm) x angle x 0.0175

The basic price is determined on the basis of price width, price height, additional charge for curved units and louvre quality (note the price group).

Additional charge for the curved unit is added to the basic price.

Additional charges for track colour, louvre widths, operation and mounting variants are added to the basic price.

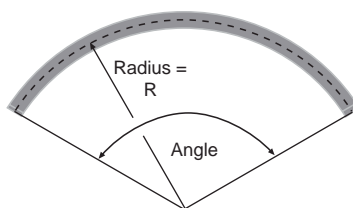

Price width = Straightened track length

## Operation variants

The Type V083 unit can only be fitted with the operation variant chain/cord with planetary gear 4:1.

The operation element is always fitted on the left. (Seen from inside the radius.)

Chain/cord 4:1  
with cord lock

