


Guiding

Side profile, rooflight


For different angles of the frame,
in silver, white, black or bronze.
Length: max. 4.00 m

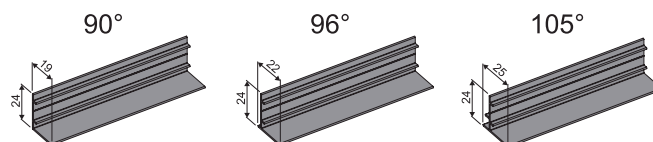

Mounting


Mounting profile

25 mm aluminium profile,
white powder-coated,
anodised silver, black or bronze.

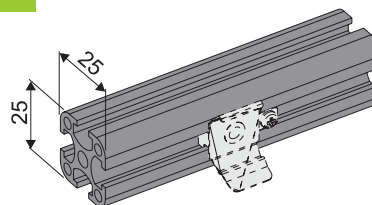


Clamping set with clip

Clip mounting (V2A) for mounting profile
with setting screw.




Mounting angle

For mounting profile with fastening material.
Aluminium die casting in silver, white, black or
bronze.



Mounting distance

In order to guarantee sufficient ventilation, a minimum spacing distance of 100 mm should be maintained between pleated blind and glass plane.
Furthermore, allowance should be made for ventilation gaps.

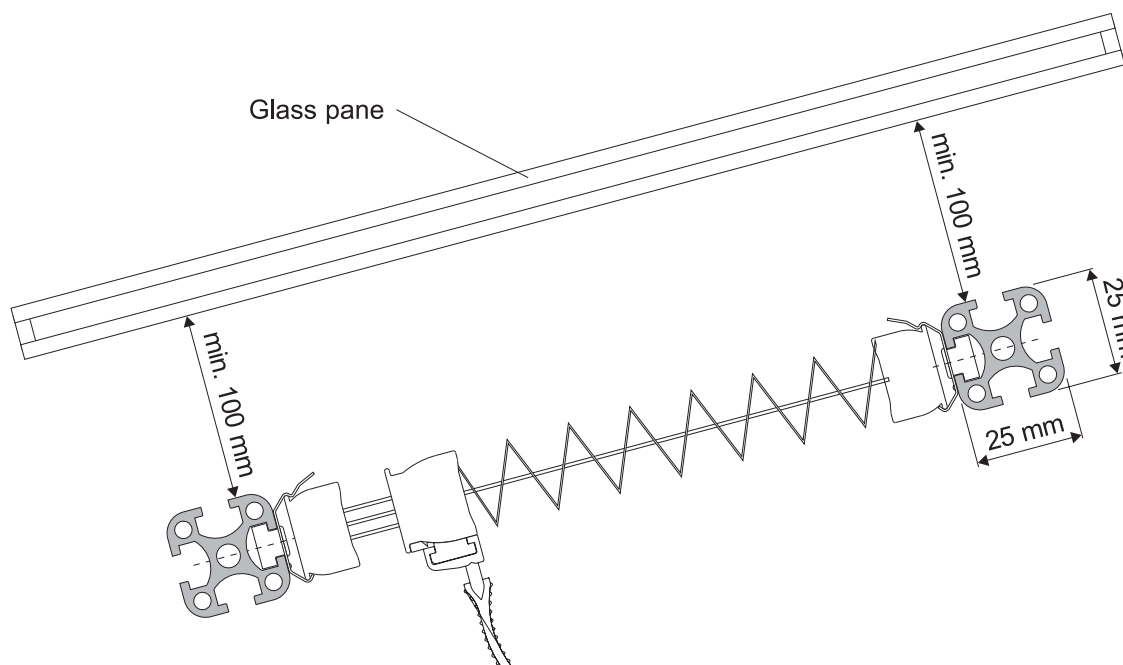

Technical specifications Motor

Standard-Motor / Heavy-duty Motor

Central drive with integrated brake and with minimum noise level. Travel limit with stop/spindle lock.

- **Dimensions:** R24 x 201 mm • **Max. size of the hanging:** 3 m² / 5 m² • **Rated voltage:** 24 V DC
- **Connection:** 2.5 m cabling • **Rated torque:** 0.4 Nm / 0.8 Nm • **Rated speed:** 40 min⁻¹ / 30 min⁻¹
- **Max. current consumption:** 0.45 A / 0.6 A • **Power consumption:** 11 W / 14 W
- **Operating temperature:** -10 up to +60 °C • **System of protection:** IP40.



Power supply

Power pack with plug

- **Dimensions:** 92.5 x 58 x 51 mm (l x w x h) • **Connection:** primary – EURO flat plug; secondary – 2 m cable
- **Input voltage:** 230 V / 50 Hz • **Output voltage:** 24 V DC SELV / 0.5 A • **Index of protection:** IP20
- **Operating temperature:** 0-40 °C • **Fuse:** thermal.



UPS 10 - Magnetic core transformer

- **Dimensions:** R45 x 35 mm • **Connection:** primary – plug-in terminals; secondary – 20 cm cable
- **Input voltage:** 230 V / 50 Hz • **Output voltage:** 24 V DC SELV / 0.37 A • **Index of protection:** IP00
- **Operating temperature:** 0-40 °C • **Output fuse:** thermal 90 °C • **Open-circuit voltage:** 40 V DC.



GPS 30 - Group power supply

- **Dimensions:** 178 x 48 x 42 mm (l x w x h) • **Connection:** primary – screw-type terminals; secondary – screw-type terminals
- **Input voltage:** 230 V / 50 Hz • **Output voltage:** 24 V DC SELV / 1.5 A • **Index of protection:** IP40
- **Operating temperature:** 0-40 °C • **Output fuse:** thermal 90 °C • **Open-circuit voltage:** 39 V DC.



Power 2.5 DC - Group power supply

- **Dimensions:** 150 x 150 x 50 mm (l x w x h) • **Connection:** primary – screw-type terminals; secondary – screw-type terminals
- **Input voltage:** 230 V / 50 Hz • **Output voltage:** 24 V DC SELV / 2.5 A adjusted
- **Index of protection:** IP20 • **Operating temperature:** 5-40 °C • **Colour:** cream white • **Output fuse:** electronic.



GPS 100 - Group power supply

- **Dimensions:** 120 x 135 x 44 mm (l x w x h) • **Connection:** primary – screw-type terminals; secondary – screw-type terminals
- **Input voltage:** 230 V / 50 Hz • **Output voltage:** 24 V DC SELV / 5 A adjusted
- **Index of protection:** IP40 • **Operating temperature:** 0-40 °C • **Output fuse:** Type TR 5 (5 A).



Switches

Inis DC - Switch with integrated power pack

Operation and voltage supply for max. 2 motors.

- **Functions:** up/stop/down • **Dimensions:** 80 x 80 x 51 mm (l x w x h) • **Colour:** white • **Connection:** primary – screw-type terminals; secondary – screw-type terminals
- **Input voltage:** 230 V / 50 Hz • **Output voltage:** 24 V DC SELV / 0.7 A • **Index of protection:** IP40 • **Operating temperature:** 5-40 °C • **Output fuse:** electronic 0.9 A / thermal 70 °C • **Colour:** cream white-grey • with **Surface cap**, grey, 91 x 89 x 44 mm.



S 51 - Push button switch


- double-pole • **Dimensions:** 32 x 25 x 28 mm (l x w x h) • **Colour:** white • with **Surface cap**, white, 86 x 43 x 39 mm



Infrared remote control

Telis 1 RTS – 1-channel IR-hand transmitter

- **Dimensions:** 120 x 45 x 17 mm (l x w x h) • **Functions:** up/stop/down • **Transmit channel:** 1 firm channel
- **Range:** 20 m • **Frequency:** 433.42 MHz • **Voltage supply:** 3 V-Battery Type CR 2430
- **Operating temperature:** 5-40 °C • inclusive face fix bracket.



Telis 4 RTS – 4-channel IR-hand transmitter

- **Dimensions:** 120 x 45 x 17 mm (l x w x h) • **Functions:** up/stop/down • **Transmit channel:** 4 firm channels
- **Range:** 20 m • **Frequency:** 433.42 Mhz • **Voltage supply:** 3 V-Battery Type CR 2430
- **Operating temperature:** 5-40 °C • inclusive face fix bracket.



Chronis RTS – Radio-wall transmitter

- **Dimensions:** 80 x 80 x 17 mm (l x w x h) • **Functions:** up/stop/down • **Transmit channel:** 1 firm channel
- **Range:** 20 m • **Frequency:** 433.42 MHz • **Voltage supply:** 3 V-Battery Type CR 2430
- **Operating temperature:** 5-40 °C • **Index of protection:** IP40 • **Colour:** cream white-grey.



Chronis RTS – Radio-program time control

Manual control or via timer.

- **Dimensions:** 80 x 80 x 27 mm (l x w x h) • **Functions:** up/stop/down + watch • **Transmit channel:** 1 firm channel
- **Range:** 20 m • **Frequency:** 433.42 MHz • **Voltage supply:** 2 x 1.5 V DC Battery (Micro LR06)
- **Operating temperature:** 5-40 °C • **Index of protection:** IP30 • **Colour:** cream white-grey.



Module DC RTS – Radio receiver

Single and group control possible.

- **Dimensions:** 150 x 25 x 25 mm (l x w x h) • **Receiving channel:** 1-12 • **Voltage supply:** 24 V DC • **Connection:** via screw-type terminals • **Index of protection:** IP40 • **Operating temperature:** 5-40 °C • **Frequency:** 433.42 MHz
- **Colour:** cream white.

